

RSD

TENUTA STELO TIPO RSD

Descrizione

La guarnizione tipo RSD è molto simile al tipo RSC, ma presenta sul lato dinamico un doppio labbro che ha più di una funzione:

- attenua eventuali fenomeni di stick-slip grazie al fluido trattenuto nell'intercapedine fra i due labbri;
- evita alle impurità di entrare dall'esterno;
- contrasta il ritiro del materiale alle basse temperature;
- funge da stabilizzatore;

Dati tecnici

Pressione: < 400 bar a temperatura di 60° C
 Velocità: < 0.5 m/s
 Temperatura: da - 35° C a + 100° C con punte fino a 110° C
 Fluidi: fluidi e oli minerali
 (vedi tabella 1 a pagina 12)

Materiale

Il materiale proposto è il poliuretano tipo C0 ad alto modulo elastico, basso compression-set, alta resistenza all'abrasione.

Ha una durezza di 93 Shore A ± 2.

Codice materiale: C0

Montaggio

Per evitare che si danneggino le guarnizioni durante il montaggio occorre eliminare le bave e gli spigoli taglienti nella sede e sullo stelo.

E' consigliabile lubrificare la tenuta durante il montaggio per agevolare l'inserimento dello stelo.

Per ulteriori informazioni leggere le istruzioni di montaggio a pag. 26.

RSD TYPE ROD SEAL

Description

The RSD seal type is similar to the RSC type, but on the dynamic side, it presents a multifunctional double lip which:

- reduces stick-slip effects thanks because it keeps oil between the secondary lip and the main one;
- stops any external impurities;
- faces the material shrinkage at low temperatures;
- acts as a stabilizer.

Technical data

Pressure: < 400 bar at a temperature of 60° C
 Speed: < 0.5 m/s
 Temperature: from - 35° C to + 100° C with peaks till 110° C
 Fluids: mineral fluids and oils
 (see table 1, page 12)

Material

The proposed material is a "C0" type polyurethane, with high elasticity modulus, low compression-set and high abrasion resistance.

The hardness is 93 Shore A ± 2.

Compound reference: C0



Assembling

To prevent any damage to the seal, remove any flash and cutting edges in the housing and on the rod.

The seal should always be lubricated before assembling in order to have easier insertion of the rod.

For further information please refer to the installation instructions on page 26.

RSD

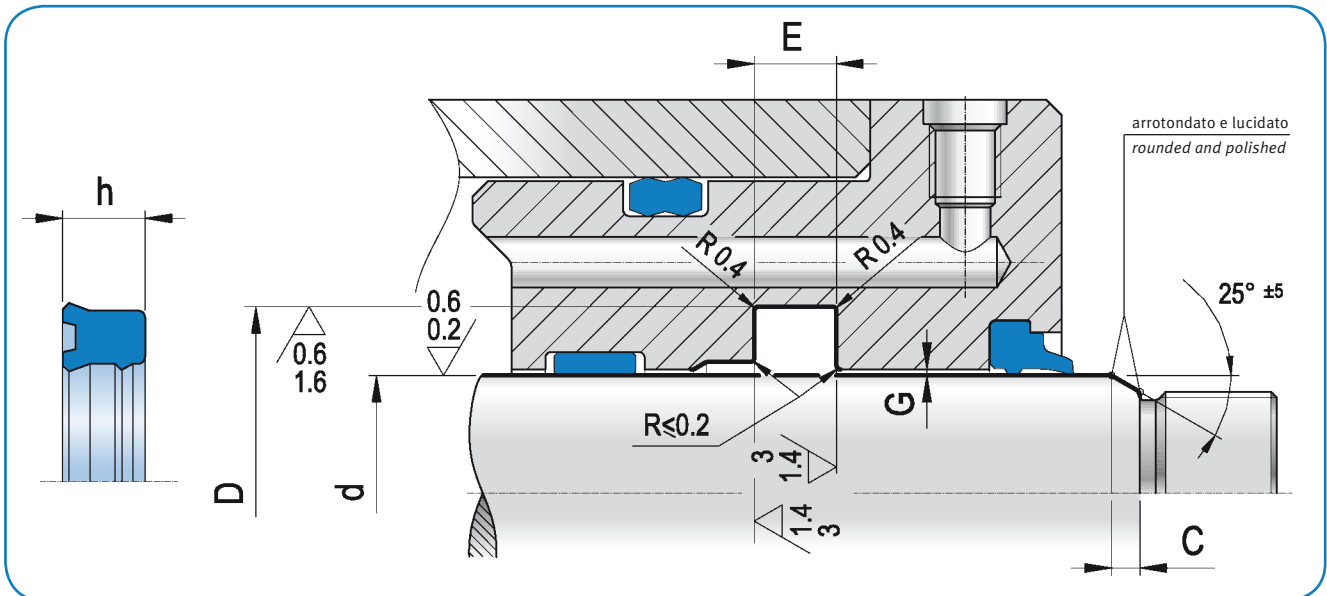


RSA
RSB
RSB2
RSC
RSD
TSS
RSO
RBR
RPS

| d_{h9} | D_{H10} | h | $E_{+0,2}$ | C | ART / ITEM |
|----------|-----------|-----|------------|-----|----------------------|
| * 6,0 | 14,0 | 5,8 | 6,3 | 3,5 | RSD 0060 0140 058 C0 |
| * 8,0 | 14,0 | 5,7 | 6,3 | 3,5 | RSD 0080 0140 057 C0 |
| * 8,0 | 16,0 | 5,8 | 6,3 | 3,5 | RSD 0080 0160 058 C0 |
| * 10,0 | 18,0 | 5,8 | 6,3 | 3,5 | RSD 0100 0180 058 C0 |
| 12,0 | 19,0 | 5,0 | 5,6 | 3,5 | RSD 0120 0190 050 C0 |
| * 12,0 | 20,0 | 5,8 | 6,3 | 4,5 | RSD 0120 0200 058 C0 |
| 14,0 | 21,0 | 5,0 | 5,6 | 4,0 | RSD 0140 0210 050 C0 |
| 14,0 | 22,0 | 5,8 | 6,3 | 4,5 | RSD 0140 0220 058 C0 |
| 15,0 | 23,0 | 6,0 | 7,0 | 4,5 | RSD 0150 0230 060 C0 |
| 16,0 | 22,0 | 5,0 | 5,6 | 3,5 | RSD 0160 0220 050 C0 |
| * 16,0 | 24,0 | 5,8 | 6,3 | 4,5 | RSD 0160 0240 058 C0 |
| 18,0 | 22,0 | 4,0 | 4,5 | 3,0 | RSD 0180 0220 040 C0 |
| 18,0 | 25,0 | 5,0 | 5,7 | 4,0 | RSD 0180 0250 050 C0 |
| * 18,0 | 26,0 | 5,8 | 6,3 | 4,5 | RSD 0180 0260 058 C0 |
| 18,0 | 26,0 | 8,0 | 9,0 | 4,5 | RSD 0180 0260 080 C0 |
| 20,0 | 26,0 | 5,2 | 6,0 | 3,5 | RSD 0200 0260 052 C0 |
| * 20,0 | 28,0 | 5,8 | 6,3 | 4,5 | RSD 0200 0280 058 C0 |
| * 20,0 | 30,0 | 7,0 | 8,0 | 5,0 | RSD 0200 0300 070 C0 |
| 22,0 | 28,0 | 4,5 | 5,5 | 3,5 | RSD 0220 0280 045 C0 |
| 22,0 | 28,0 | 5,8 | 6,3 | 3,5 | RSD 0220 0280 058 C0 |
| 22,0 | 29,0 | 5,0 | 5,6 | 4,0 | RSD 0220 0290 050 C0 |
| * 22,0 | 30,0 | 5,8 | 6,3 | 4,5 | RSD 0220 0300 058 C0 |
| 24,0 | 32,0 | 5,8 | 6,3 | 4,5 | RSD 0240 0320 058 C0 |
| 25,0 | 31,0 | 5,0 | 5,6 | 3,5 | RSD 0250 0310 050 C0 |
| * 25,0 | 33,0 | 5,8 | 6,3 | 4,5 | RSD 0250 0330 058 C0 |
| 25,0 | 33,0 | 6,5 | 7,5 | 4,5 | RSD 0250 0330 065 C0 |
| 25,0 | 33,0 | 7,0 | 8,0 | 4,5 | RSD 0250 0330 070 C0 |

| d_{h9} | D_{H10} | h | $E_{+0,2}$ | C | ART / ITEM |
|----------|-----------|------|------------|-----|----------------------|
| * 25,0 | 35,0 | 7,0 | 8,0 | 5,0 | RSD 0250 0350 070 C0 |
| 25,0 | 35,0 | 8,0 | 9,0 | 5,0 | RSD 0250 0350 080 C0 |
| * 28,0 | 36,0 | 5,8 | 6,3 | 4,5 | RSD 0280 0360 058 C0 |
| * 28,0 | 38,0 | 5,8 | 6,3 | 5,0 | RSD 0280 0380 058 C0 |
| * 28,0 | 38,0 | 7,0 | 8,0 | 5,0 | RSD 0280 0380 070 C0 |
| 30,0 | 38,0 | 5,8 | 6,3 | 4,5 | RSD 0300 0380 058 C0 |
| 30,0 | 38,0 | 7,0 | 8,0 | 4,5 | RSD 0300 0380 070 C0 |
| 30,0 | 38,0 | 8,0 | 9,0 | 4,5 | RSD 0300 0380 080 C0 |
| 30,0 | 40,0 | 6,5 | 7,5 | 5,0 | RSD 0300 0400 065 C0 |
| 30,0 | 40,0 | 10,0 | 11,0 | 5,0 | RSD 0300 0400 100 C0 |
| 32,0 | 40,0 | 5,8 | 6,3 | 4,5 | RSD 0320 0400 058 C0 |
| 32,0 | 40,0 | 6,0 | 7,0 | 4,5 | RSD 0320 0400 060 C0 |
| 32,0 | 40,0 | 8,0 | 9,0 | 4,5 | RSD 0320 0400 080 C0 |
| * 32,0 | 42,0 | 7,0 | 8,0 | 4,5 | RSD 0320 0420 070 C0 |
| 32,0 | 42,0 | 8,0 | 9,0 | 5,0 | RSD 0320 0420 080 C0 |
| 32,0 | 42,0 | 10,0 | 11,0 | 5,0 | RSD 0320 0420 100 C0 |
| 32,0 | 45,0 | 8,0 | 9,0 | 7,0 | RSD 0320 0450 080 C0 |
| 35,0 | 43,0 | 5,8 | 6,3 | 4,5 | RSD 0350 0430 058 C0 |
| 35,0 | 43,0 | 6,0 | 7,0 | 4,5 | RSD 0350 0430 060 C0 |
| 35,0 | 43,0 | 8,0 | 9,0 | 4,5 | RSD 0350 0430 080 C0 |
| 35,0 | 45,0 | 7,0 | 8,0 | 5,0 | RSD 0350 0450 070 C0 |
| 35,0 | 45,0 | 10,0 | 11,0 | 5,0 | RSD 0350 0450 100 C0 |
| * 36,0 | 44,0 | 5,8 | 6,3 | 4,5 | RSD 0360 0440 058 C0 |
| 36,0 | 44,0 | 8,0 | 9,0 | 4,5 | RSD 0360 0440 080 C0 |
| 40,0 | 48,0 | 5,8 | 6,3 | 4,5 | RSD 0400 0480 058 C0 |
| 40,0 | 48,0 | 8,0 | 9,0 | 4,5 | RSD 0400 0480 080 C0 |
| * 40,0 | 50,0 | 7,0 | 8,0 | 5,0 | RSD 0400 0500 070 C0 |

* in conformità alle norme ISO/DIN 5597 e ISO 5597/1 – in accordance with ISO/DIN 5597 and ISO 5597/1 norms



RSD

| d _{h9} | D _{H10} | h | E _{+0,2} | C | ART / ITEM |
|-----------------|------------------|------|-------------------|-----|----------------------|
| 40,0 | 50,0 | 10,0 | 11,0 | 5,0 | RSD 0400 0500 100 CO |
| 40,0 | 55,0 | 10,0 | 11,0 | 6,5 | RSD 0400 0550 100 CO |
| 42,0 | 50,0 | 6,0 | 7,0 | 4,5 | RSD 0420 0500 060 CO |
| 42,0 | 52,0 | 8,0 | 9,0 | 5,0 | RSD 0420 0520 080 CO |
| * 45,0 | 53,0 | 5,8 | 6,3 | 4,5 | RSD 0450 0530 058 CO |
| 45,0 | 53,0 | 8,0 | 9,0 | 4,5 | RSD 0450 0530 080 CO |
| 45,0 | 53,0 | 10,0 | 11,0 | 4,5 | RSD 0450 0530 100 CO |
| * 45,0 | 55,0 | 5,7 | 6,3 | 5,0 | RSD 0450 0550 057 CO |
| * 45,0 | 55,0 | 7,0 | 8,0 | 5,0 | RSD 0450 0550 070 CO |
| 45,0 | 55,0 | 10,0 | 11,0 | 5,0 | RSD 0450 0550 100 CO |
| 46,0 | 54,0 | 8,0 | 9,0 | 4,5 | RSD 0460 0540 080 CO |
| 50,0 | 58,0 | 8,0 | 9,0 | 4,5 | RSD 0500 0580 080 CO |
| * 50,0 | 60,0 | 7,0 | 8,0 | 5,0 | RSD 0500 0600 070 CO |
| 50,0 | 60,0 | 9,0 | 10,0 | 5,0 | RSD 0500 0600 090 CO |
| 50,0 | 60,0 | 10,0 | 11,0 | 5,0 | RSD 0500 0600 100 CO |
| 50,0 | 65,0 | 8,0 | 9,0 | 6,5 | RSD 0500 0650 080 CO |
| 50,0 | 65,0 | 10,0 | 11,0 | 6,5 | RSD 0500 0650 100 CO |
| 55,0 | 63,0 | 8,0 | 9,0 | 4,5 | RSD 0550 0630 080 CO |
| 55,0 | 65,0 | 7,0 | 8,0 | 5,0 | RSD 0550 0650 070 CO |
| 55,0 | 65,0 | 10,0 | 11,0 | 5,0 | RSD 0550 0650 100 CO |
| 56,0 | 64,0 | 8,0 | 9,0 | 4,5 | RSD 0560 0640 080 CO |
| 56,0 | 66,0 | 6,5 | 7,5 | 5,0 | RSD 0560 0660 065 CO |
| * 56,0 | 71,0 | 11,5 | 12,5 | 6,5 | RSD 0560 0710 115 CO |
| 60,0 | 68,0 | 8,0 | 9,0 | 4,5 | RSD 0600 0680 080 CO |
| 60,0 | 70,0 | 7,0 | 8,0 | 5,5 | RSD 0600 0700 070 CO |
| 60,0 | 70,0 | 7,5 | 8,5 | 5,5 | RSD 0600 0700 075 CO |
| 60,0 | 70,0 | 10,0 | 11,0 | 5,5 | RSD 0600 0700 100 CO |
| 60,0 | 70,0 | 12,0 | 13,0 | 5,5 | RSD 0600 0700 120 CO |
| 60,0 | 72,0 | 9,0 | 10,0 | 6,0 | RSD 0600 0720 090 CO |
| 61,0 | 69,0 | 8,0 | 9,0 | 4,5 | RSD 0610 0690 080 CO |
| 63,0 | 71,0 | 8,0 | 9,0 | 4,5 | RSD 0630 0710 080 CO |
| 65,0 | 73,0 | 8,0 | 9,0 | 4,5 | RSD 0650 0730 080 CO |
| 65,0 | 75,0 | 12,0 | 13,0 | 5,0 | RSD 0650 0750 120 CO |
| 65,0 | 77,0 | 9,0 | 10,0 | 6,0 | RSD 0650 0770 090 CO |
| 68,0 | 76,0 | 8,0 | 9,0 | 4,5 | RSD 0680 0760 080 CO |
| 70,0 | 78,0 | 8,0 | 9,0 | 4,5 | RSD 0700 0780 080 CO |
| * 70,0 | 80,0 | 6,5 | 7,5 | 5,5 | RSD 0700 0800 065 CO |
| 70,0 | 80,0 | 7,0 | 8,0 | 5,0 | RSD 0700 0800 070 CO |
| 70,0 | 80,0 | 12,0 | 13,0 | 5,5 | RSD 0700 0800 120 CO |
| 70,0 | 82,0 | 9,5 | 10,5 | 6,0 | RSD 0700 0820 095 CO |
| * 70,0 | 85,0 | 11,5 | 12,5 | 6,5 | RSD 0700 0850 115 CO |
| 75,0 | 83,0 | 8,0 | 9,0 | 4,5 | RSD 0750 0830 080 CO |
| 75,0 | 85,0 | 7,0 | 8,0 | 5,5 | RSD 0750 0850 070 CO |
| 75,0 | 85,0 | 12,0 | 13,0 | 5,5 | RSD 0750 0850 120 CO |
| 76,0 | 84,0 | 8,0 | 9,0 | 4,5 | RSD 0760 0840 080 CO |

| d _{h9} | D _{H10} | h | E _{+0,2} | C | ART / ITEM |
|-----------------|------------------|------|-------------------|-----|----------------------|
| 76,0 | 86,0 | 8,0 | 9,0 | 5,0 | RSD 0760 0860 080 CO |
| 78,0 | 86,0 | 8,0 | 9,0 | 4,5 | RSD 0780 0860 080 CO |
| 80,0 | 88,0 | 8,0 | 9,0 | 4,5 | RSD 0800 0880 080 CO |
| 80,0 | 90,0 | 12,0 | 13,0 | 5,0 | RSD 0800 0900 120 CO |
| 80,0 | 92,0 | 9,0 | 10,0 | 6,0 | RSD 0800 0920 090 CO |
| * 80,0 | 95,0 | 11,5 | 12,5 | 6,5 | RSD 0800 0950 115 CO |
| 85,0 | 93,0 | 8,0 | 9,0 | 4,5 | RSD 0850 0930 080 CO |
| 85,0 | 95,0 | 12,0 | 13,0 | 5,5 | RSD 0850 0950 120 CO |
| 90,0 | 98,0 | 8,0 | 9,0 | 4,5 | RSD 0900 0980 080 CO |
| * 90,0 | 100,0 | 6,5 | 7,5 | 5,5 | RSD 0900 1000 065 CO |
| * 90,0 | 105,0 | 11,5 | 12,5 | 6,5 | RSD 0900 1050 115 CO |
| 91,0 | 99,0 | 8,0 | 9,0 | 4,5 | RSD 0910 0990 080 CO |
| 95,0 | 103,0 | 8,0 | 9,0 | 4,5 | RSD 0950 1030 080 CO |
| 100,0 | 108,0 | 6,5 | 7,5 | 4,5 | RSD 1000 1080 065 CO |
| 100,0 | 108,0 | 8,0 | 9,0 | 4,5 | RSD 1000 1080 080 CO |
| 105,0 | 113,0 | 8,0 | 9,0 | 4,5 | RSD 1050 1130 080 CO |
| 107,0 | 115,0 | 8,0 | 9,0 | 4,5 | RSD 1070 1150 080 CO |
| 108,0 | 116,0 | 8,0 | 9,0 | 4,5 | RSD 1080 1160 080 CO |
| * 110,0 | 125,0 | 9,5 | 10,5 | 6,5 | RSD 1100 1250 095 CO |
| 110,0 | 125,0 | 11,0 | 12,0 | 6,5 | RSD 1100 1250 110 CO |
| 115,0 | 123,0 | 8,0 | 9,0 | 4,5 | RSD 1150 1230 080 CO |
| 115,0 | 130,0 | 11,3 | 12,0 | 6,5 | RSD 1150 1300 113 CO |
| 120,0 | 128,0 | 11,5 | 12,5 | 4,5 | RSD 1200 1280 115 CO |
| 120,0 | 135,0 | 15,0 | 16,0 | 6,5 | RSD 1200 1350 150 CO |
| 125,0 | 133,0 | 8,0 | 9,0 | 4,5 | RSD 1250 1330 080 CO |
| 126,0 | 134,0 | 8,0 | 9,0 | 4,5 | RSD 1260 1340 080 CO |
| 130,0 | 145,0 | 15,0 | 16,0 | 6,5 | RSD 1300 1450 150 CO |
| 135,0 | 143,0 | 8,0 | 9,0 | 4,5 | RSD 1350 1430 080 CO |
| 135,0 | 150,0 | 11,5 | 12,5 | 6,5 | RSD 1350 1500 115 CO |
| 140,0 | 150,0 | 11,5 | 12,5 | 5,0 | RSD 1400 1500 115 CO |
| 145,0 | 153,0 | 8,0 | 9,0 | 4,5 | RSD 1450 1530 080 CO |

Nota: altre dimensioni non a catalogo a richiesta. Consultare il nostro ufficio tecnico.

Remark: please contact our technical dept. for further dimensions not included in the catalogue.

* in conformità alle norme ISO/DIN 5597 e ISO 5597/1 – in accordance with ISO/DIN 5597 and ISO 5597/1 norms